AUTOFLO

ENGINEERED TO BE BETTER

MAINS POWER SENSOR TAP - WALL MOUNTED

S38 WALL-STD-M

Auto)Aqua

The Australian designed and manufactured, *AutoAqua* S38 Wall - Std Mains Power Sensor Tap is suitable for a range of hand washing applications, particularly in public commercial areas that experience high traffic and therefore high usage, meaning conservation of water is of paramount importance. The 6-star WELS rating ensures hygienic bathroom environments for users, delivered economically and in an environmentally sensitive fashion.

The robust construction is complemented with an array of features ensuring consistent performance. The ability to self-range to its environment, the hygienic self-flush performed every 24 hours, the capability for multiple tap installations from one power source, coupled with its sleek design are just some of what sets the *AutoAqua* S38 Wall - Std Mains Power Sensor Tap apart from similar models in the market.

FEATURES


- Operating range self-initialisation
- Accessories available for multiple tap installations from one power source
- Spray type flow controller for economical water usage
- Auto Hygienic Self Flush every 24-72 hours
- Dual stage water filters to avoid solenoid blockages
- Optional remote control for adjustment from factory settings
- Available with different flow control options with economical, regular, and healthcare.

TYPICAL DIMENSIONS



Order Code: 100-0194 : 100-0194_REG : 100-0194_HC : 100-0194_MB : 100-0194_REG_MB : 100-0194_PRJ



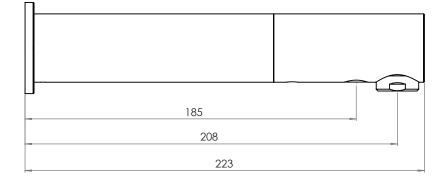



Every effort is made to ensure specifications are correct at the time of printing. Autoflo Pty Ltd reserves the right to make changes without prior notice. All measurements shown are in millimetres.

WWW.AUTOFLO.COM.AU

AUTOFLO

MAINS POWER SENSOR TAP - WALL MOUNTED

S38 WALL - STD - M

Auto)Aqua

ENGINEERED TO BE BETTER

TECHNICAL SPECIFICATIONS


- TAP BODY Solid brass chrome plated
- SENSOR RANGE 120mm factory set
- OPERATING SUPPLY 12v Power Pack
- OPERATING PRESSURE 50 to 500kPa
- RUN TIME Continuous 2 minutes max.
- SOLENOID Latching/soft closing, brass body
- MAX TEMPERATURE 50°C



TYPICAL INSTALLATION



COMPONENTS SUPPLIED

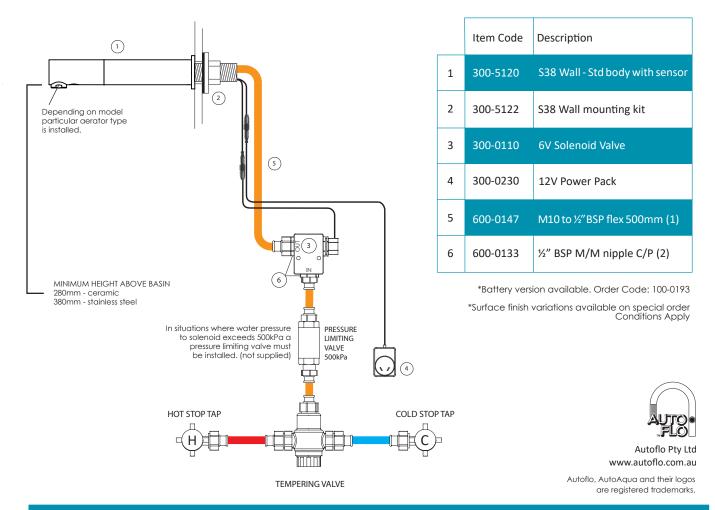

DESIGNED AND MANUFACTURED IN AUSTRALIA TO WORLD STANDARD